
R430006LE-TB

Bantam Tie-Back Self Retracting Lifeline with Leading Edge Capability

FEATURES

- 9 foot working range
- 1 inch Kevlar® and UHMWPE webbing
- Tie-back hook is designed for direct connection around an anchorage and back onto the web
- Thermoplastic housing
- Swivel top with steel web connector
- Tie-back snap hook is self-locking with a minimum tensile breaking strength of 5,000 pounds, and a 3,600 pound gate rating

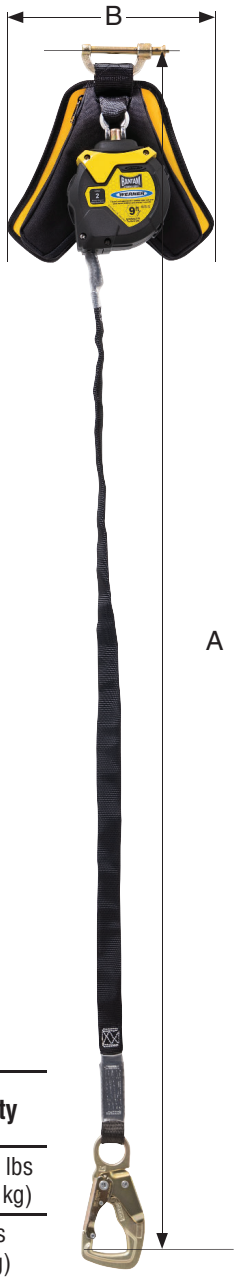

SPECIFICATIONS

Model No.	Lifeline Connector	(A)	(B)	Depth	Aprox. Weight
R430006LE-TB	Steel Tie-Back Snap Hook	53 in (1,346 mm)	4 9⁄16 in (116 mm)	2 9⁄32 in (58 mm)	3.9 lbs (1.2 kg)

OVERHEAD USE NON LEADING EDGE APPLICATIONS

Meets	Maximum Arrest Distance	Average Arrest Force	Maximum Arrest Force	Free Fall Limit	Capacity
ANSI Z359.14-2021 CLASS 2	24 in (610 mm)	1,350 lbf (6 kN)	1,800 lbf (8 kN)	24 in (610 mm)	130 - 310 lbs (59 - 141 kg)
OSHA 29 CFR 1910.140 & 1926.502	42 in (1067 mm)	N/A	1,800 lbf (8 kN)	24 in (610 mm)	400 lbs (181 kg)

COMPLIANCE STANDARDS
LEADING EDGE USE APPLICATIONS

Meets	Free Fall Limit	Maximum Arrest Force	Average Arrest Force	Minimum Setback Distance	Clearance requirement when falling over edge	Capacity
ANSI Z359.14-2021 CLASS 2	6 ft (1.8 m)	1,800 lbf (8 kN)	900 lbf (4 kN)	2 ft (0.6 m)	17.5 ft (5.4 m)	130 - 310 lbs (59 - 141 kg)
OSHA 29 CFR 1910.140/1926.502	6 ft (1.8 m)	1,800 lbf (8 kN)	N/A	2 ft (0.6 m)	17.5 ft (5.4 m)	310 lbs (141 kg)

**See User Instructions for more information.*

⚠ **WARNING:** Compliant fall protection equipment must only be used as it was designed and adhere to the hierarchy of controls as discussed in ANSI Z359.2. Users MUST read and follow all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.30 and 1926.503, or local safety regulations. Misuse or failure to heed these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

Technical Data Sheet

WERNER CO. CORPORATE HEADQUARTERS: 555 Pierce Rd., Suite 300, Itasca, IL, 60143
TEL: 888-523-3371 FAX: (888) 456-8459 www.wernerco.com

TDSR430006LE-TB RevB ©2023 Werner Co. 3/23